


Polzahl No. of pos.	A ±0.2	B ±0.1 (b)	C ±0.1	D ±0.1	Art.-Nr. Part-No
13	45.6	12x2.5=30	12x2.54=30.48	40	101A10089X
21	65.6	20x2.5=50	20x2.54=50.80	60	101A10109X
31	90.6	30x2.5=75	30x2.54=76.20	85	101A10129X

- NOTES:
- INSULATOR: PC GF UL 94 V-1, GREY
  - CONTACTS: COPPER ALLOY  
PLATING: GOLD OVER NICKEL  
50 MATING CYCLES
  - CONNECTOR IS PART MARKED: PART-NO CONEC ABC

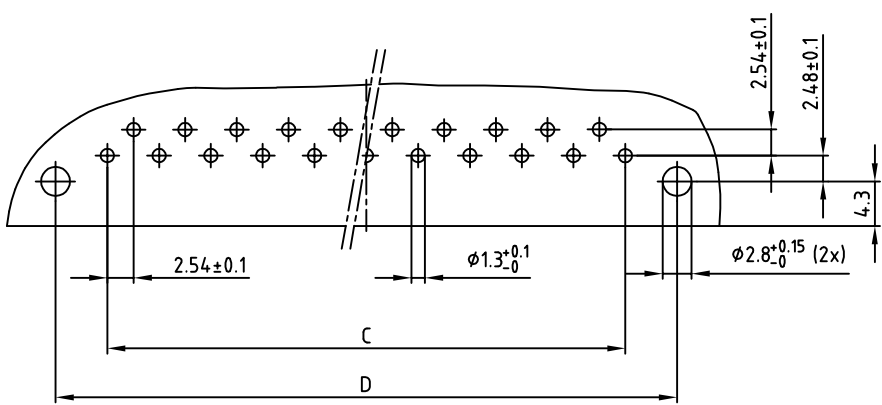

P.C.B. HOLE DRILLINGS  
(P.C.B. TOP SIDE)

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

tolerance		dim. in mm	
2013	date	name	
drawn	27.06.	Henneboel	
appd.	27.06.	Koch	
norm	DIN 41617		
d-old			
2 x b	Ä5359	25.09.2014	K.H.
a	Original		
rev.	description	date	name



scale:	2:1
material:	SEE NOTES
title:	MALE CONNECTOR 13pos.-31pos. / 2.54mm with angled solder pins
dwg no:	10K2A028
part no:	SEE TABLE
DIN-A	3
sh:	1/1